

1249174

BEST AVAILABLE COPY

THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office

November 15, 2004

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE.

APPLICATION NUMBER: 60/513,117
FILING DATE: *October 21, 2003*
RELATED PCT APPLICATION NUMBER: PCT/US04/34871

Certified by



Jon W Dudas

Acting Under Secretary of Commerce
for Intellectual Property
and Acting Director of the U.S.
Patent and Trademark Office

17414 U.S. PTO
102103

Atty. Dkt. No. 026032-4404

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE


00746 U.S. PTO
60/513117
102103

Applicant: Campbell, et al.

Title: SYSTEM AND METHOD FOR
SELECTING A USER SPEECH
PROFILE FOR A DEVICE IN A
VEHICLE

Appl. No.: To be determined

Filing Date: To be determined

CERTIFICATE OF EXPRESS MAILING	
I hereby certify that this correspondence is being deposited with the United States Postal Service's "Express Mail Post Office To Addressee" service under 37 C.F.R. § 1.10 on the date indicated below and is addressed to: Commissioner for Patents, PO Box 1450, Alexandria, Virginia 22313-1450.	
EL 979073559 US	10/21/03
(Express Mail Label Number)	(Date of Deposit)
Roberta A. Cooper	
(Printed Name)	
	
(Signature)	

PROVISIONAL PATENT APPLICATION
TRANSMITTAL

Mail Stop **PROVISIONAL PATENT APPLICATION**

Commissioner for Patents

PO Box 1450

Alexandria, Virginia 22313-1450

Sir:

Transmitted herewith for filing under 37 C.F.R. § 1.53(c) is the provisional patent application of:

Douglas C. Campbell
7717 5 Mile Road
Northville, MI 48167

Michael Supanich
68 Forest Hills Drive
Holland, MI 49424

Mark Zeinstra
945 Meadow Ridge Drive
Holland, MI 49424

Enclosed are:

- ☒ Specification and Claim(s) (21 pages).
- ☒ Informal drawings (4 sheets, Figures 1-3).
- ☒ Application Data Sheet (37 CFR 1.76).

The filing fee is calculated below:

	Rate	Fee Totals
Basic Fee	\$160.00	\$160.00
<input type="checkbox"/> Small Entity Fees Apply (subtract ½ of above):	=	\$0.00
TOTAL FILING FEE:	=	\$160.00

- ☒ Check number 13106 in the amount of \$160.00 to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge any additional fees which may be required regarding this application under 37 C.F.R. §§ 1.16-1.17, or credit any overpayment, to Deposit Account No. 06-1447. Should no proper payment be enclosed herewith, as by a check being in the wrong amount, unsigned, post-dated, otherwise improper or informal or even entirely missing, the Commissioner is authorized to charge the unpaid amount to Deposit Account No. 06-1447.

Please direct all correspondence to the undersigned attorney or agent at the address indicated below.

Respectfully submitted,

Date 10/21/03

FOLEY & LARDNER
 Customer Number: 26371
 Telephone: (414) 297-5531
 Facsimile: (414) 297-4900

By Jean M. Tibbetts
 Jean M. Tibbetts
 Attorney for Applicant
 Registration No. 43,193

U.S. PROVISIONAL PATENT APPLICATION

for

SYSTEM AND METHOD FOR SELECTING A USER SPEECH PROFILE

FOR A DEVICE IN A VEHICLE

Inventors:

Douglas C. Campbell
7717 5 Mile Road
Northville, MI 48167
Citizenship: USA

Michael Supanich
68 Forest Hills Drive
Holland, Michigan 49424
Citizenship: USA

Mark Zeinstra
945 Meadow Ridge Drive
Holland, Michigan 49424
Citizenship: USA

SYSTEM AND METHOD FOR SELECTING A USER SPEECH PROFILE FOR A DEVICE IN A VEHICLE

FIELD OF THE INVENTION

[0001] The present invention relates to in-vehicle systems and devices such as a wireless communication system and, in particular, to a system and method for selecting a user speech profile for a speech recognition system included in device or system in a vehicle.

BACKGROUND OF THE INVENTION

[0002] Personal mobile communication services, such as cellular phones, have become very popular. Such devices are commonly used while a user is traveling in a vehicle, such as an automobile, as either a driver or passenger. Use of a cellular phone by the driver of a vehicle, however, can be inconvenient and inefficient. In order to operate the phone, the driver typically has to dial and/or hold the phone with one hand. Cellular phones may be small and awkward and uncomfortable to hold while in use. Several solutions have been developed to make use of a cellular phone more convenient for a driver or passenger of a vehicle. For example, headphones may be used in conjunction with a cellular phone so that the phone does not need to be held to the driver's ear. Alternatively, a phone or equivalent communication device may be integrated into the interior and electrical system of the vehicle. Typically, however, a driver will also have a personal portable cellular phone and may have to establish multiple wireless service contracts for the portable phone and the phone integrated in to the car. Accordingly, various hands-free phone systems have been developed for

vehicles that allow the hands-free use of a driver's or passenger's personal cellular phone.

[0003] Hands-free phone systems may include a speech recognition system to enable the use of verbal commands to control the hands-free phone system. Many speech recognition systems allow a user to train the speech recognition system to their voice and dialect. Multiple different users (e.g., a driver and passengers of a vehicle), however, may use the hands-free phone system in the vehicle. In addition, a vehicle may include a number of other systems and devices that include or utilize a speech recognition system, such as a navigation system, an audio system, etc. There is a need, therefore, for a system and method to identify the user of the hands-free phone system or other voice controlled system in the vehicle in order to select the appropriate user speech profile for the speech recognition system.

SUMMARY

[0004] In accordance with one embodiment, a system for selecting a user speech profile for a device in a vehicle includes a control module including a speech recognition system configured to process audio signals and having a speaker enrollment function configured to create a user speech profile for at least one user and a memory coupled to the speech recognition system and configured to store a plurality of user speech profiles. The system further includes an external device configured to transmit a control signal to the vehicle including an identifier associated with a user speech profile, wherein the control module uses the identifier to select the user speech profile associated with the identifier and the speech recognition system uses the selected user speech profile to process the audio signals. In one embodiment, the

external device is a wireless external device. The wireless external device may be, for example, an RKE key fob, a wireless phone, a personal digital assistant, a pager, a portable computer, a passive entry key, a smart card, an optical entry device or a magnetic entry device. In another embodiment, the external device is, for example, a vehicle key or a removable memory device. In another embodiment, a plurality of external devices are configured to include an identifier associated with a user speech profile and the memory includes a prioritization list indicating a user preference for each external device.

[0005] In accordance with another embodiment, a system for selecting a user speech profile for a device in a vehicle, the system includes a control module including a speech recognition system configured to process audio signals and having a speaker enrollment function configured to create a user speech profile for at least one user and a memory coupled to the speech recognition system and configured to store a plurality of user speech profiles. The system further includes a user input device configured to receive an input command from a user that includes an identifier associated with a user speech profile, wherein the control module uses the identifier to select the user speech profile associated with the identifier and the speech recognition system uses the selected user speech profile to process the audio signals. The user input device may be, for example, a microphone configured to receive a voice signal from the user, a memory switch, a keypad or a biometric identification device. In another embodiment, the system includes a plurality of user input devices configured to receive an input command from a user that includes an identifier associated with a user

speech profile and the memory includes a user prioritization list indicating a user preference for each user input device.

[0006] In accordance a further embodiment, a system for selecting a user speech profile for a hands-free wireless communication system in a vehicle includes a control module including a speech recognition system configured to process audio signals and having a speaker enrollment function configured to create a user speech profile for at least one user and a memory coupled to the speech recognition system and configured to store a plurality of user speech profiles. The system further includes an external device configured to transmit a control signal to the vehicle including an identifier associated with a user speech profile, wherein the control module uses the identifier to select the user speech profile associated with the identifier and the speech recognition system uses the selected user speech profile to process the audio signals. In one embodiment, the external device is a wireless external device. The wireless external device may be, for example, an RKE key fob, a wireless phone, a personal digital assistant, a pager, a portable computer, a passive entry key, a smart card, an optical entry device or a magnetic entry device. In another embodiment, the external device is, for example, a vehicle key or a removable memory device. In another embodiment, a plurality of external devices are configured to include an identifier associated with a user speech profile and the memory includes a prioritization list indicating a user preference for each external device.

[0007] In accordance with yet another embodiment, a system for selecting a user speech profile for a hands-free wireless communication system in a vehicle, the system includes a control module including a speech recognition system

configured to process audio signals and having a speaker enrollment function configured to create a user speech profile for at least one user and a memory coupled to the speech recognition system and configured to store a plurality of user speech profiles. The system further includes a user input device configured to receive an input command from a user that includes an identifier associated with a user speech profile, wherein the control module uses the identifier to select the user speech profile associated with the identifier and the speech recognition system uses the selected user speech profile to process the audio signals. The user input device may be, for example, a microphone configured to receive a voice signal from the user, a memory switch, a keypad or a biometric identification device. In another embodiment, the system includes a plurality of user input devices configured to receive an input command from a user that includes an identifier associated with a user speech profile and the memory includes a user prioritization list indicating a user preference for each user input device.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] The invention will be more readily understood by reference to the following description taken with the accompanying drawings, in which:

[0009] FIG. 1A is a schematic block diagram of a system for hands-free operation of a wireless communication device in a vehicle in accordance with an embodiment.

[0010] FIG. 1B is a schematic block diagram of a system for hands-free operation of a wireless communication device in a vehicle in accordance with an alternative embodiment.

[0011] FIG. 2 is a schematic block diagram of a system for selecting a user speech profile for a hands-free wireless communication system in accordance with an embodiment.

[0012] FIG. 3. illustrates a method for selecting a user speech profile for a device in a vehicle in accordance with an embodiment.

DESCRIPTION OF PREFERRED EMBODIMENTS

[0013] Figure 1A is a schematic block diagram of a system for hands-free operation of a wireless communication device in a vehicle in accordance with an embodiment. The system enables a vehicle occupant, such as a driver, to make a "hands free" call using his/her personal portable wireless phone 114 to another device or system 120 via communication network 116 without requiring the driver to take his/her eyes off of the road and/or his/her hands off of the steering wheel while the vehicle is in motion. Other vehicle occupants (e.g., passengers) may also use the system to make "hands free" calls. The following description will refer to a wireless communication system, however, the systems and method described herein may also be used in conjunction with other devices or systems in the car that are controlled by or used to control other devices using verbal commands and therefore include or utilize a speech recognition system and, in particular, a speech recognition system having a speaker enrollment function. For example, systems such as a navigation system, an audio system, etc. may utilize a speech recognition system. While a wireless communication system and, in particular, a hands free wireless communication system will be referred to throughout the discussion of various preferred embodiments, it should

be understood the embodiments of the systems and methods for selecting a user speech profile are not limited to use with a wireless communication system.

[0014] The system shown in Figure 1A enables a wireless communication link to be established between an audio system 104 of vehicle 100 and a portable wireless communications device 114 of a vehicle occupant such as a wireless (e.g., cellular) phone. A system and method for establishing a wireless communication link between a vehicle system, such as an audio system, and an electronic device is described in pending U.S. Patent Application Serial No. 09/979,199, filed November 20, 2001, entitled "Wireless Communication System and Method," herein incorporated by reference in its entirety. The following description will refer to a wireless or cellular phone, however, it should be understood that systems and methods described herein may be used in conjunction with other wireless communication devices, such as a PDA (personal digital assistant), a portable computer, a pager, etc.

[0015] Returning to Figure 1A, vehicle 100 also includes a control module 102 coupled to the audio system 104 and an antenna 112. In an alternative embodiment, shown in Figure 1B, control module 102 is incorporated into an audio system 104. Returning to Figure 1A, antenna 112, in conjunction with an RF transceiver 140 in control module 102, enables two-way communication with the wireless phone 114. RF transceiver 140 is configured to transmit and receive signals from wireless communication device 114. Control module 102 is also coupled to a user interface 110 and a microphone 108. User interface 110 may be used to receive input commands from a vehicle occupant. Alternatively, input commands may be a set of audio signals from a vehicle occupant. For example, a vehicle occupant may speak

directly into the microphone 108 to provide commands to the control module 102. A speech recognition system 122 in control module 102 may be used to process audio signals received by microphone 108. Voice recognition technologies known in the art may be implemented in speech recognition system 122.

[0016] Control module 102 may also be coupled to a display 106 that may, for example, comprise a small cathode ray tube (CRT), a liquid crystal display (LCD) or various other forms of displays which are easily visible in daytime as well as nighttime driving conditions. Each element in vehicle 100 shown in Figure 1A, may be mounted in the same or different interior vehicle elements such as a dashboard, an overhead console, a visor, a rearview mirror, or other appropriate location in the vehicle. Preferably, user interface 110, microphone 108 and display 106 are mounted in a location convenient to the vehicle occupants, in particular, the driver.

[0017] Audio system 104 may include, for example, a radio, an amplifier and at least one speaker configured to provide audio signals to a vehicle occupant(s). In one embodiment, audio system 104 may include a speech recording/playback system as described in U.S. Patent 5,810,420, herein incorporated by reference.

[0018] As mentioned above, control module 102 is linked via a wireless communication link with a wireless communication device 114 such as a wireless phone. A communication link may be established with different wireless phones as different occupants use the communication system. A communication link may be established, for example, in response to a command received from the user via user interface 110 or a verbal signal received by microphone 108. The wireless communication link operates in accordance with a wireless communications standard.

The wireless communications standard is preferably the Bluetooth communications standard but may be, for example, the Shared Wireless Access Protocol – Cordless Access (SWAP-CA) specification or any other suitable wireless communication standard that enables the transmission of voice and/or data information. Accordingly, wireless phone 114 is enabled to operate in accordance with or to communicate with the wireless communication standard of the wireless communication link.

[0019] The Bluetooth communication standard was established for creating small form factor, low cost, short range RF links between mobile telephones, network computers, PDA's and other portable electronic devices. It is the result of a joint effort between several major commercial organizations to develop an RF communications standard for creating secure, wireless communication links between portable electronic devices. The Bluetooth standard provides the potential for automatic and rapid "ad hoc" wireless connections when two or more devices equipped with RF transceivers operating in accordance with the Bluetooth standard come into proximity with each other. For example, once a Bluetooth enabled phone has been "paired" (or registered) with a Bluetooth enabled control module, a wireless connection may be established automatically when a Bluetooth enabled wireless phone is within a predetermined distance of a Bluetooth enabled control module. While the Bluetooth standard may be referred to throughout the discussion of various preferred embodiments, it should be understood such embodiments are not limited to the use of any specific communication standard.

[0020] The communication link between the control module 102 and the wireless phone 114 enables "hands free" use of a vehicle occupant's personal wireless

phone 114 including both outgoing and incoming calls. For example, a user may dial a number on the wireless phone 114 to place a call and the conversation thereafter can be conducted via the microphone 108 and audio system 104. Alternatively, a call could be placed via commands and numbers spoken into microphone 108 and transmitted via the wireless communications link to the wireless phone 114. Calls and information may also be received by control module 102 from wireless phone 114 via the wireless communication link. Audio information received may be provided to the user via audio system 104 and data received from the wireless phone 114 may be displayed on display 106.

[0021] For an outgoing call, audio signals received via microphone 108 are processed by the control module 102 and sent to the wireless phone 114 in the proper data format, for example, in accordance with the Bluetooth communication standard. The wireless phone 114 converts the signals received from the control module 102 to the appropriate cellular or wireless technology of the wireless service provider associated with the vehicle occupant's wireless phone 114 (e.g., Analog, Digital, CDMA, TDMA, GSM, etc.). The converted signal is then sent by the wireless phone 114 to a communication network 116 (e.g., cellular tower(s)) for transmission to the desired end device or system 120. For example, a cellular tower may receive a signal from the wireless phone 114, convert the signal to a "land line" signal and send the signal through a switch to the phone being called. Typically, at various stages in the communication process the signal is processed to, for example, reduce noise, echo, etc. For example, the control module 102 may process the signal received from the microphone 108 to reduce the noise from the vehicle.

[0022] As mentioned, a user may provide verbal commands to control module 102 via microphone 108. Accordingly, control module 102 includes a speech recognition system 122 that is used to process voice commands. Voice recognition technologies known in the art may be implemented in speech recognition system 122. Preferably, speech recognition system 122 includes a speaker enrollment function that enables a user to train the speech recognition system to their voice and dialect. The speaker enrollment function typically improves the ability of speech recognition system 122 to recognize and process the voice commands provided by the user. Multiple users may each utilize the speaker enrolment function to train speech recognition system 122. For example, a first user may initiate a training sequence and perform a series of steps in which the user speaks predetermined words, phrases and or sentences into microphone 108. The training sequence may be initiated by, for example, the user actuating an input device of user interface 110 or by providing a verbal command received by microphone 108. The speaker enrollment function processes the voice and dialect of the first user and creates a user speech profile for the first user. The user speech profile may be stored in a memory 124 of speech recognition system 122. User speech profiles may also be created for a second user, a third user, etc. Accordingly, the appropriate user and user speech profile should be selected so that speech recognition system 122 uses the appropriate voice patterns to process voice commands from the user.

[0023] Figure 2 is a schematic block diagram of a system for selecting a user profile for a hands-free wireless communication system in accordance with an embodiment. As mentioned above, the system for selecting a user speech profile may

be used with other devices in the vehicle that may include or utilize a speech recognition system such as a navigation system. Returning to Figure 2, control module 202 includes speech recognition system 222 and memory 224 and is coupled to microphone 208 and audio system 204. Audio system 204 may include, for example, a radio/amplifier 226 and speakers 228. As mentioned with respect to Figure 1B, in one embodiment, the control module 202 is incorporated into audio system 204. Speech recognition system 222 includes a speaker enrollment function as described above with respect to Figure 1A. User speech profiles generated by the speech enrollment function for a plurality of users may be stored in memory 224. In one embodiment, each user speech profile is assigned a memory location identifier that may be selected by the user using, for example, a user interface 210 such as a memory switch, a numeric keypad, etc. When a user enters an identifier or activates a memory switch, speech recognition system 222 retrieves the appropriate user speech profile. Alternatively, a voice print of the user may be used to identify the appropriate user speech profile, i.e., when a user speaks into microphone 108, speech recognition system 222 may be configured to identify the user by their voice.

[0024] In another embodiment, an external wireless device 236 may be used to provide an identifier to select a specific user speech profile stored in memory 224. For example, a remote keyless entry (RKE) key fob 234 is used to wirelessly transmit an RF control signal to a vehicle to control a vehicle function such as door locks, windows, etc. The control signal may be configured to include an identifier for a user speech profile. Control module 102 is coupled to and has access to a vehicle data bus that may carry the information from the control signal provided by the RKE key fob

234. Upon receipt of the control signal (e.g. after the user actuates the key fob to send the control signal) the identifier may be used by the speech recognition system 222 to select the appropriate user speech profile. Accordingly, the voice patterns for the specific user may be used by the speech recognition system to process voice signals from the user. Alternatively, a wireless mobile communication device 230, e.g., a cellular phone, may transmit an identifier that may be used by control module 202 and speech recognition system 222 to select the appropriate user speech profile. For example, a Bluetooth enabled phone may transmit an identifier when a wireless communication link is established when the Bluetooth enabled phone comes into proximity with the control module 202. Other external wireless devices 236 may also be used to transmit an identifier, such as a PDA, a portable computer, a pager, a passive entry key, a smart card, optical (e.g., infrared) or magnetic entry devices, etc.

[0025] In yet another embodiment, an identifier may be provided by an external device 232 such as a vehicle key. When the vehicle key is placed in a door lock of the vehicle, a control signal including an identifier of a user and/or user speech profile may be transmitted to a vehicle bus. As mentioned above, the control module 202 may be coupled to the vehicle bus. The control signal may be transmitted from the vehicle key to the vehicle bus via electrical contacts in the door lock. Alternatively, a keyless entry code may be used that includes and/or points to an identifier for a user and/or user speech profile. When a user enters a keyless entry code using a user input device such as a keypad on a vehicle door, the data provided or identified by the keyless entry code may be transmitted on the vehicle bus where it is available to control module 202. In another embodiment, a biometric identification device such as an

optical scanner or a fingerprint recognition device may be used to provide an identifier for a user and/or user speech profile. In yet another embodiment, a removable memory device may be used to provide an identifier for the user and/or user speech profile. For example, an input for the removable memory device may be provided at the control module 202 or at another location in the vehicle. As mentioned above, control module 202 is preferably coupled to a vehicle bus to access data from other devices in the vehicle.

[0026] In one embodiment, control module 202 may be configured to include a prioritization of the devices used to identify a user speech profile. A user may provide a prioritization list that may be stored in memory 224 that indicates which device should be used to identify a user speech profile, for example, a user may indicate a key fob should be the primary means to identify the user. Alternatively, the control module may prompt the user, for example by a display or user interface 210, to select a user speech profile if there is a mismatch between the various devices.

[0027] Figure 3 illustrates a method for selecting a user speech profile for a device in a vehicle including or utilizing a speech recognition system in accordance with an embodiment. At block 302, a user initiates a training sequence for a speaker enrollment function of the speech recognition system. The training sequence may be initiated by, for example, the user actuating an input device of a user interface. The user may, for example, perform a series of steps in which the user speaks predetermined words, phrases and/or sentences into a microphone. The speaker enrollment function processes the voice and dialect of the user and creates a user speech profile at block 304. At block 306, the user speech profile may be stored in a

memory of the speech recognition system. At block 308, a control module and/or speech recognition system receives an identifier that enables the speech recognition system to select a user speech profile at block 310. As discussed above with respect to Figure 2, various external devices and/or user input devices may be used to provide an identifier used to select the user and/or user speech profile (block 310). For example, a user interface may be used to select a memory location for a user speech profile or an external wireless device (e.g., key fob, wireless phone), external device (e.g., vehicle key), keyless entry code, etc. may be used to provide an identifier for a user and/or user speech profile.

[0028] It is important to note that the construction and arrangement of the systems and devices as shown in the preferred and other exemplary embodiments are illustrative only. Although only a few embodiments of the present invention have been described in detail in this disclosure, those skilled in the art who review this disclosure will readily appreciate that many modifications are possible (e.g., variations in sizes, dimensions, structures, shapes and proportions of the various elements, values of parameters, mounting arrangements, materials, colors, orientations, etc.) without materially departing from the novel teachings and advantages of the subject matter recited herein. Accordingly, all such modifications are intended to be included within the scope of the present invention as described herein. The order or sequence of any processes or method steps may be varied or re-sequenced according to alternative embodiments. Other substitutions, modifications, changes and/or omissions may be made in the design, operating conditions and arrangement of the preferred and other

exemplary embodiments without departing from the exemplary embodiments of the present invention as expressed herein.

We Claim:

1. A system for selecting a user speech profile for a device in a vehicle, the system comprising:
 - a control module including:
 - a speech recognition system configured to process audio signals and having a speaker enrollment function configured to create a user speech profile for at least one user; and
 - a memory coupled to the speech recognition system and configured to store a plurality of user speech profiles; and
 - an external device configured to transmit a control signal to the vehicle including an identifier associated with a user speech profile;
 - wherein the control module uses the identifier to select the user speech profile associated with the identifier and the speech recognition system uses the selected user speech profile to process the audio signals.
2. A system according to claim 1, wherein the external device is a wireless external device.
3. A system according to claim 1, wherein the external device is a vehicle key or a removable memory device.
4. A system according to claim 2, wherein the wireless external device is one of an RKE key fob, a wireless phone, a Personal digital assistant, a pager, a portable computer, a passive entry key, a smart card, an optical entry device, or a magnetic entry device.
5. A system according to claim 1, wherein a plurality of external devices are configured to include an identifier associated with a user speech profile, the memory including a user prioritization list indicating a user preference for each external device.

6. A system for selecting a user speech profile for a device in a vehicle, the system comprising:

a control module including:

a speech recognition system configured to process audio signals and having a speaker enrollment function configured to create a user speech profile for at least one user; and

a memory coupled to the speech recognition system and configured to store a plurality of user speech profiles; and

a user input device configured to receive an input command from a user that includes an identifier associated with a user speech profile;

wherein the control module uses the identifier to select the user speech profile associated with the identifier and the speech recognition system uses the selected user speech profile to process the audio signals.

7. A system according to claim 6, wherein the user input device is one of a memory switch, a keypad or a biometric identification device.

8. A system according to claim 6, further including a plurality of user input devices that are configured to receive an input command from a user that includes an identifier associated with a user speech profile wherein the memory includes a user prioritization list indicating a user preference for each user input device.

9. A system for selecting a user speech profile for a hands-free wireless communication system in a vehicle, the system comprising:

a control module including:

a speech recognition system configured to process audio signals and having a speaker enrollment function configured to create a user speech profile for at least one user; and

a memory coupled to the speech recognition system and configured to store a plurality of user speech profiles; and

an external device configured to transmit a control signal to the vehicle including an identifier associated with a user speech profile;

wherein the control module uses the identifier to select the user speech profile associated with the identifier and the speech recognition system uses the selected user speech profile to process the audio signals.

10. A system according to claim 9, wherein the external device is a wireless external device.

11. A system according to claim 9, wherein the external device is a vehicle key or a removable memory device.

12. A system according to claim 10, wherein the wireless external device is one of an RKE key fob, a wireless phone, a Personal digital assistant, a pager, a portable computer, a passive entry key, a smart card, an optical entry device, or a magnetic entry device.

13. A system according to claim 9, wherein a plurality of external devices are configured to include an identifier associated with a user speech profile, the memory including a user prioritization list indicating a user preference for each external device.

14. A system for selecting a user speech profile for a hands-free wireless communication system in a vehicle, the system comprising:

a control module including:

a speech recognition system configured to process audio signals and having a speaker enrollment function configured to create a user speech profile for at least one user; and

a memory coupled to the speech recognition system and configured to store a plurality of user speech profiles; and

a user input device configured to receive an input command from a user that includes an identifier associated with a user speech profile;

wherein the control module uses the identifier to select the user speech profile associated with the identifier and the speech recognition system uses the selected user speech profile to process the audio signals.

15. A system according to claim 14, wherein the user input device is one of a memory switch, a keypad, or a biometric identification device.

16. A system according to claim 14, further including a plurality of user input devices that are configured to receive an input command from a user that includes an identifier associated with a user speech profile wherein the memory includes a user prioritization list indicating a user preference for each user input device.

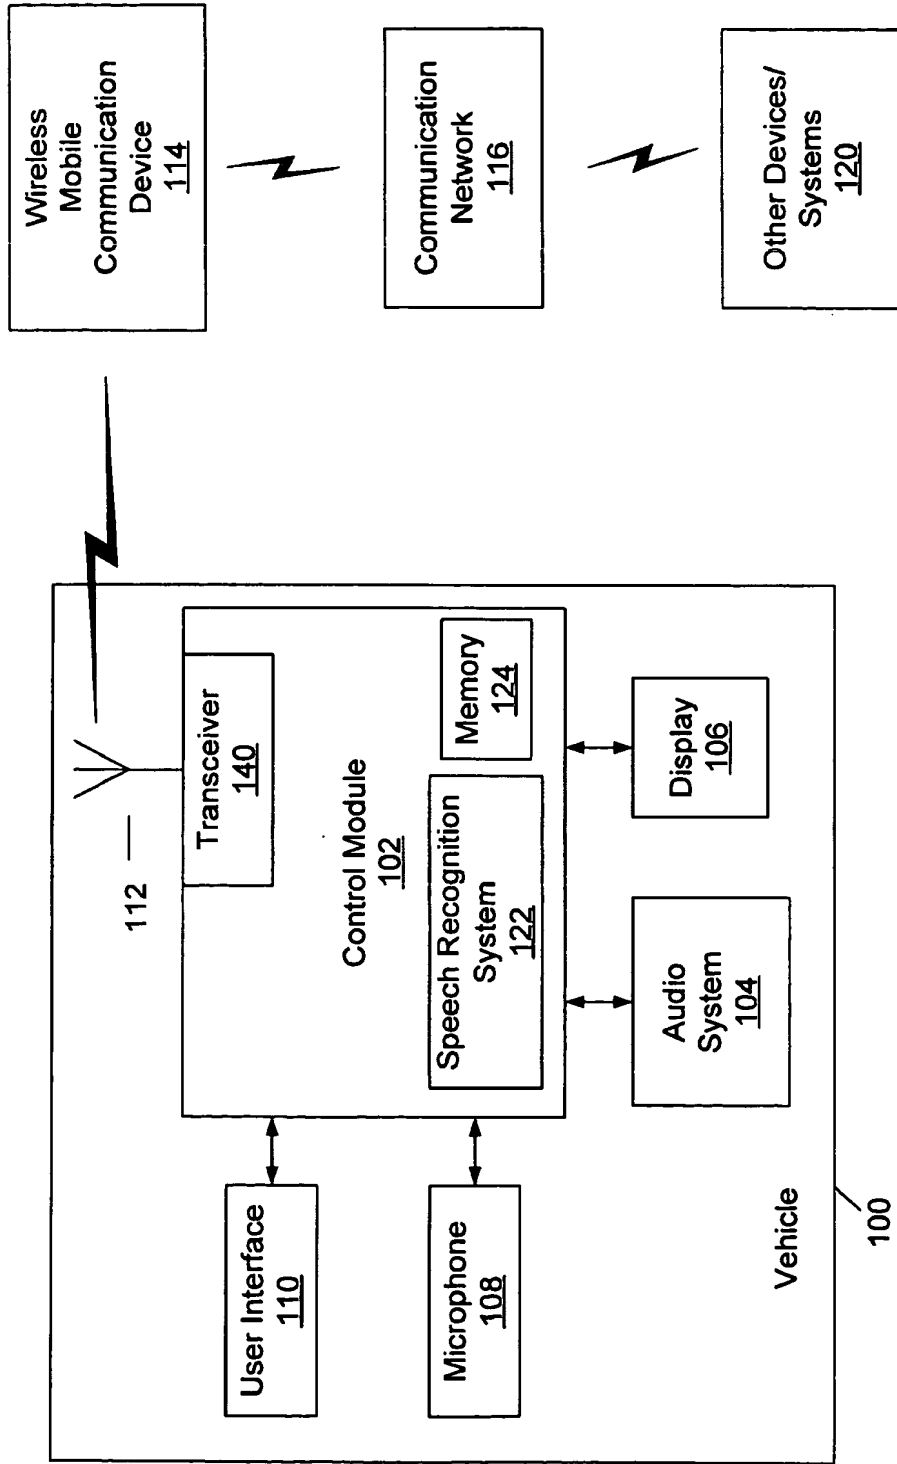


FIG. 1A

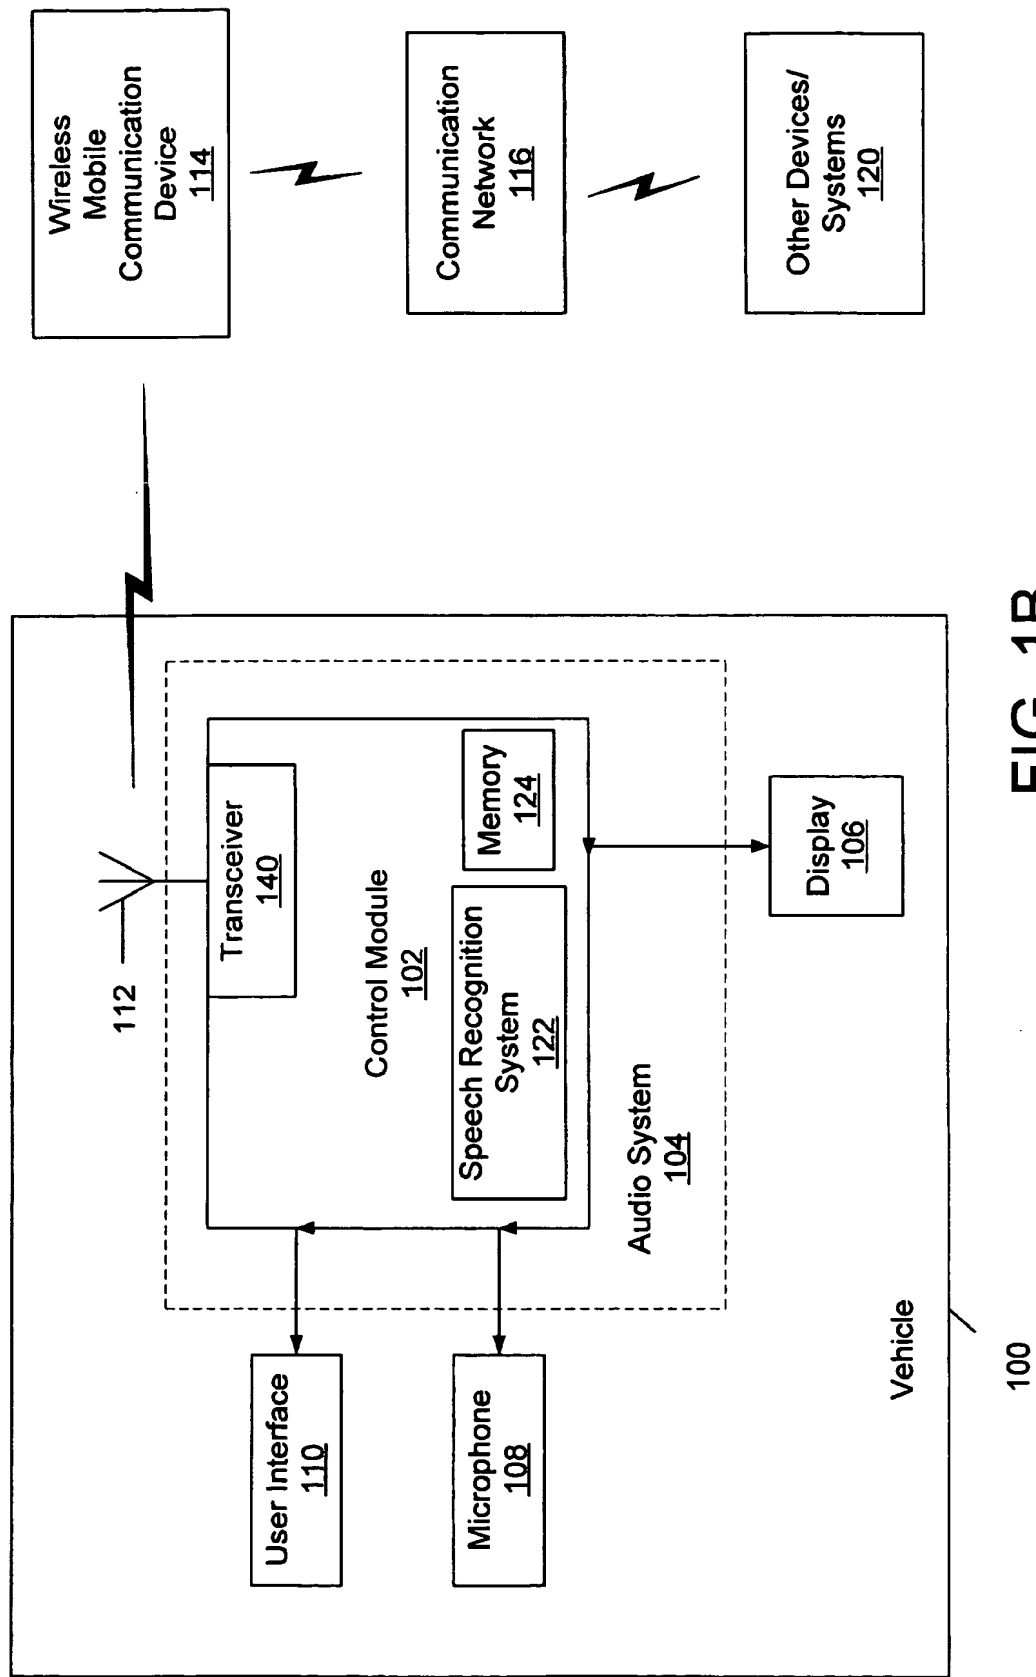


FIG. 1B

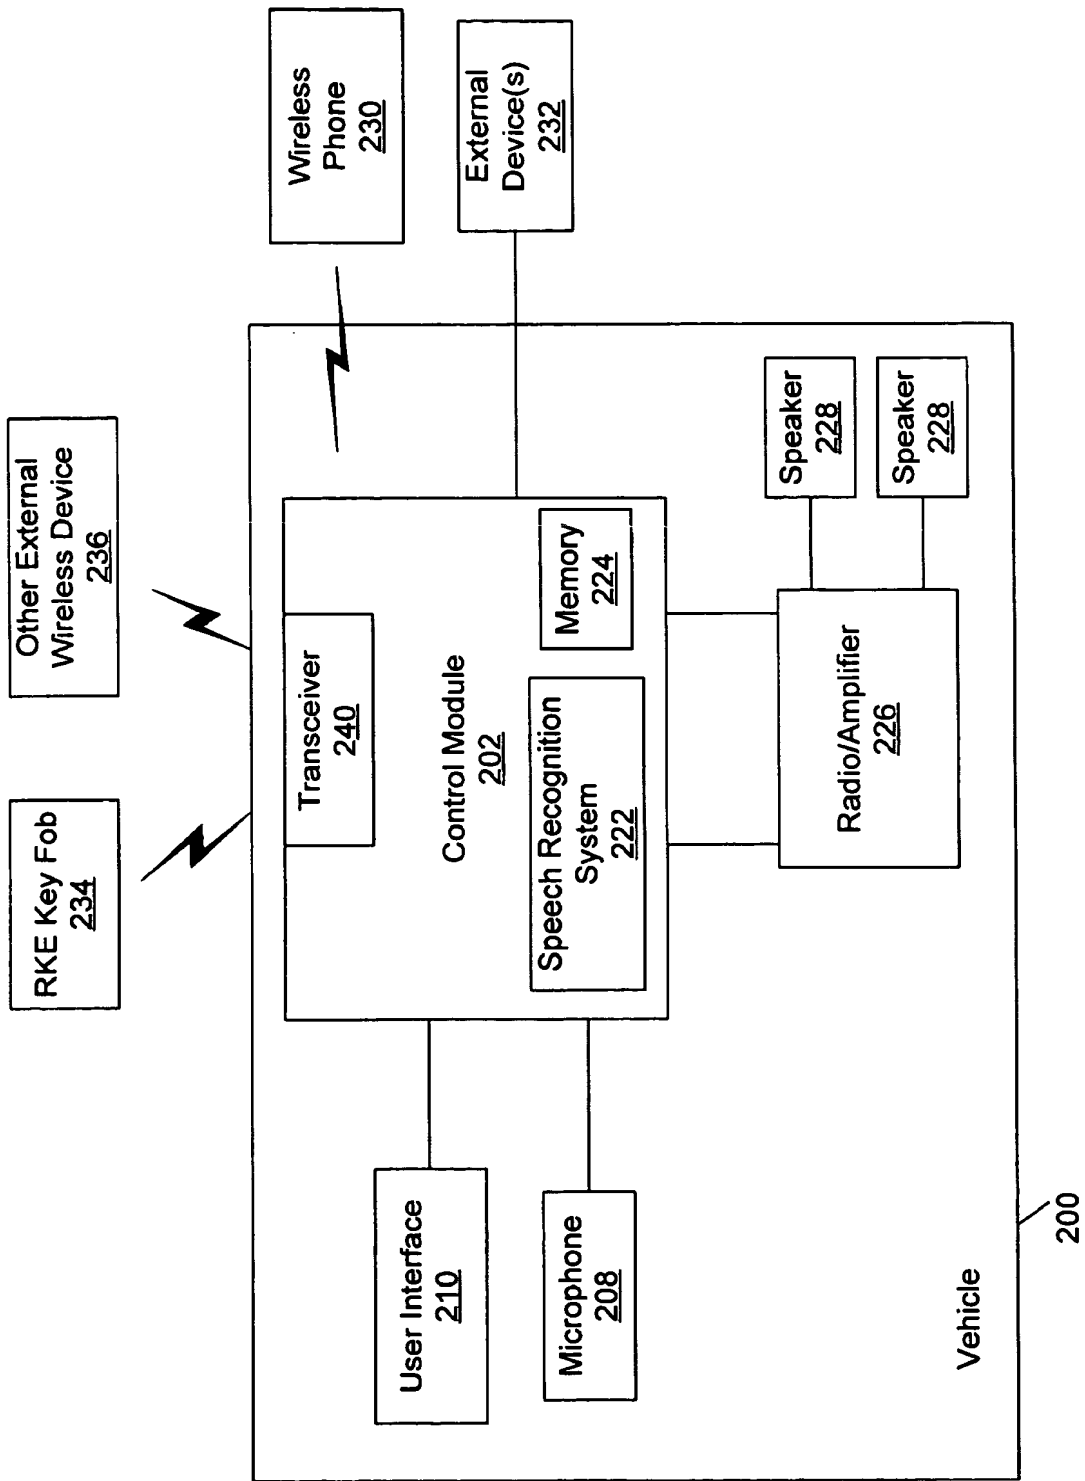


FIG. 2

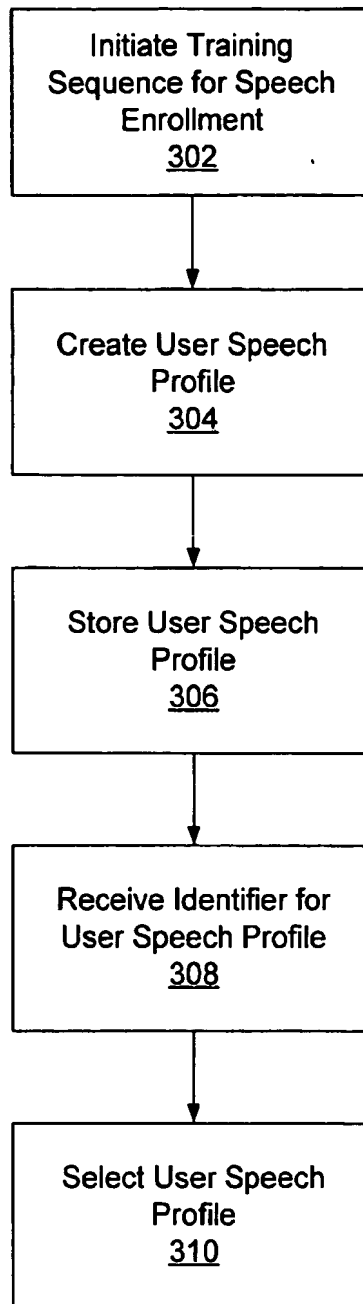


FIG. 3

Application Data Sheet

Application Information

Application Type::	Provisional
Subject Matter::	Utility
Suggested classification::	
Suggested Group Art Unit::	
CD-ROM or CD-R?::	None
Computer Readable Form (CRF)?::	No
Title::	SYSTEM AND METHOD FOR SELECTING A USER SPEECH PROFILE FOR A DEVICE IN A VEHICLE
Attorney Docket Number::	026032-4404
Request for Early Publication?::	No
Request for Non-Publication?::	No
Suggested Drawing Figure::	2
Total Drawing Sheets::	4
Small Entity?::	No
Petition included?::	No
Secrecy Order in Parent Appl.?::	No

Applicant Information

Applicant Authority Type::	Inventor
Primary Citizenship Country::	US
Status::	Full Capacity
Given Name::	Douglas C.
Family Name::	Campbell

City of Residence :: Northville
State or Province of Michigan
Residence::
Country of Residence:: US
Street of mailing address:: 7717 5 Mile Road
City of mailing address:: Northville
State or Province of mailing MI
address::
Postal or Zip Code of mailing 48167
address::

Applicant Authority Type:: Inventor
Primary Citizenship Country:: US
Status:: Full Capacity
Given Name:: Michael
Family Name:: Supanich
City of Residence:: Holland
State or Province of Michigan
Residence::
Country of Residence:: US
Street of mailing address:: 68 Forest Hills Drive
City of mailing address:: Holland
State or Province of mailing MI
address::
Postal or Zip Code of mailing 49424
address::

Applicant Authority Type:: Inventor
Primary Citizenship Country:: US
Status:: Full Capacity
Given Name:: Mark

Family Name:: Zeinstra
City of Residence:: Holland
State or Province of Michigan
Residence::
Country of Residence:: US
Street of mailing address:: 945 Meadow Ridge Drive
City of mailing address:: Holland
State or Province of mailing MI
address::
Postal or Zip Code of mailing 49424
address::

Correspondence Information

Correspondence Customer Number:: 26371
E-Mail address:: PTOMailMilwaukee@Foley.com

Representative Information

Representative Designation::	Registration Number::	Representative Name::
Primary	54,589	MATHEW P. ANDERSON
Primary	46,521	SCOTT D. ANDERSON
Primary	29,512	RUSSELL J. BARRON
Primary	39,902	DAVID J. BATES
Primary	42,308	STEVEN C. BECKER
Primary	51,495	MICHAEL S. BRAYER
Primary	52,673	MARCUS A. BURCH

Primary	35,093	CHARLES G. CARTER
Primary	44,603	ALISTAIR K. CHAN
Primary	26,416	JOHN C. COOPER III
Primary	34,144	JEFFREY N. COSTAKOS
Primary	52,801	SCOTT M. DAY
Primary	30,844	BARRY L. GROSSMAN
Primary	47,619	JEFFREY S. GUNDERSEN
Primary	48,367	JOHN M. LAZARUS
Primary	47,746	KENNETH G. LEMKE
Primary	40,365	KEITH D. LINDENBAUM
Primary	39,282	DAVID G. LUETTGEN
Primary	52,008	M. SCOTT MC BRIDE
Primary	35,610	RICHARD J. MC KENNA
Primary	32,505	JAMES G. MORROW
Primary	50,755	SCOTT C. NIELSON
Primary	45,651	JASON E. PAULS
Primary	38,276	TODD A. RATHE
Primary	30,128	MICHAEL D. RECHTIN
Primary	48,580	MARCUS W. SPROW
Primary	47,959	M. REED STAHELI
Primary	43,193	JEAN M. TIBBETTS
Primary	38,646	JOHN A. VANOPHEM
Primary	34,279	JAMES A. WILKE
Primary	35,421	JOSEPH N. ZIEBERT
Primary	40,883	WALTER E. ZIMMERMAN

Domestic Priority Information

Application::	Continuity Type::	Parent Application::	Parent Filing Date::

Foreign Priority Information

Country::	Application number::	Filing Date::	Priority Claimed::

Assignee Information

Assignee name:: Johnson Controls Technology Company

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/US04/034871

International filing date: 21 October 2004 (21.10.2004)

Document type: Certified copy of priority document

Document details: Country/Office: US
Number: 60/513,117
Filing date: 21 October 2003 (21.10.2003)

Date of receipt at the International Bureau: 22 November 2004 (22.11.2004)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.